



Interface And Appearance

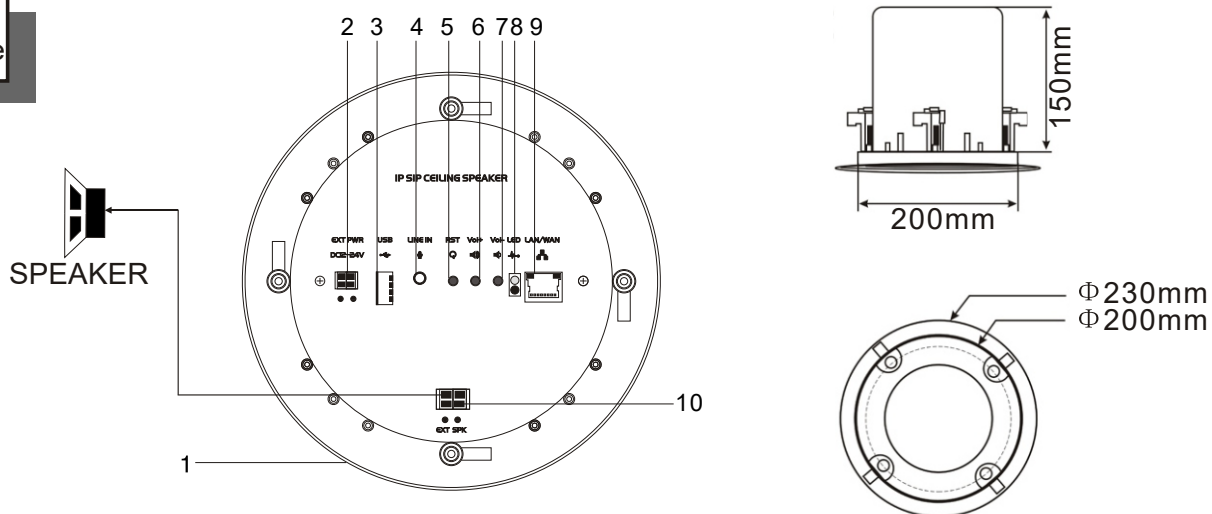

- | | |
|------------------------|---------------------------------------|
| 1 POE Ceiling Speaker | 6 Volume Up |
| 2 DC12-24V power input | 7 Volume Down |
| 3 USB Input | 8 LED Light |
| 4 Line In | 9 LAN&POE |
| 5 ARM Reset | 10 Extension speaker output interface |

Network Connection

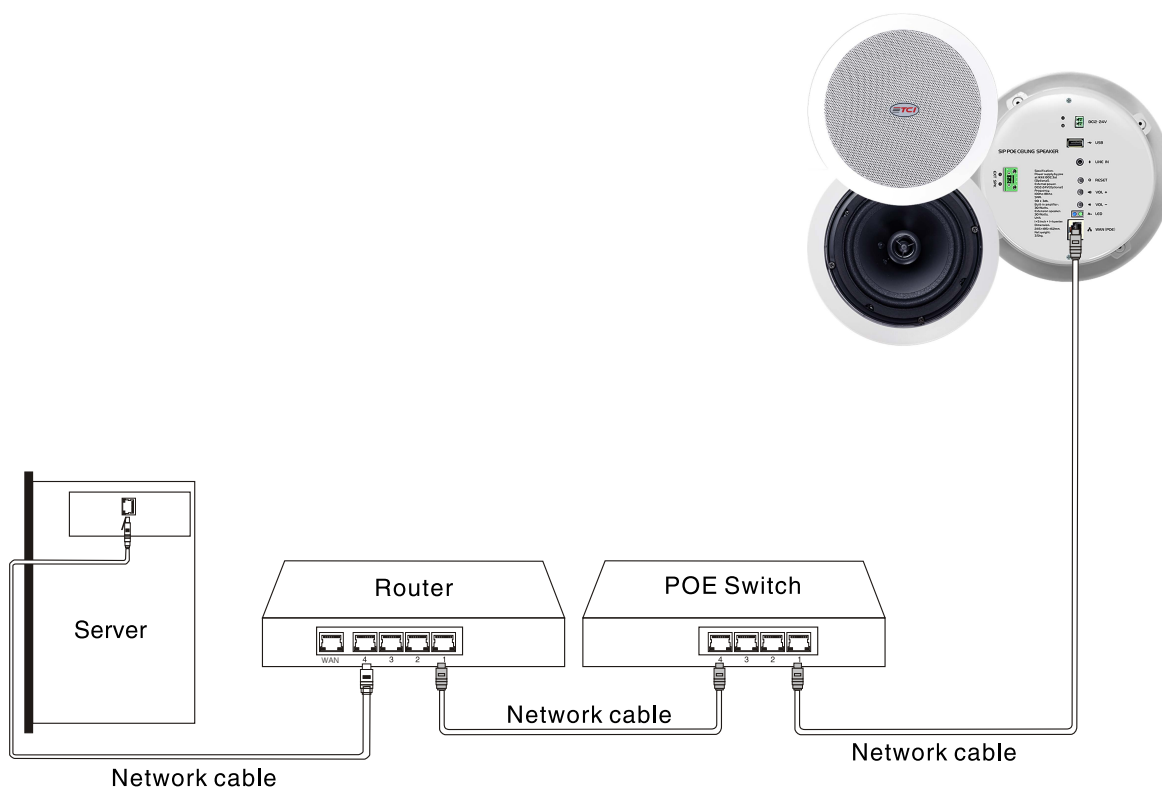

Main Features

1. DC12-24V external power supply, optional POE power supply, supporting IEEE 802.3at and IEEE 802.3bt.
2. The maximum output power can reach 25W for a single POE main speaker and 25W for an extended speaker;
3. Support obtaining tracks from servers and USB drives;
4. Compatible with the standard SIP (RFC3261) protocol and can access main stream IP PBX/IMS platforms;
5. Support VOIP telephone access;
6. Support remote fixed point broadcasting, remote sub multicast broadcasting, and global broadcasting;
7. Equipped with remote Internet playback function;
8. It can be linked to an IP camera video to monitor the on-site situation in real-time during the broadcast process;
9. Support most of the audio formats supported by Windows: MP3, WAV, etc.

Parameter

Model	TCI-C30POE
Impedance	80hm
Power Supply	DC12V-24V or POE
Transport Protocol	SIP 2.0, TCP/IP, UDP, DHCP
Frequency Response	90Hz-18KHz
Sensitivity	88-92dB
Narrowband Encoding	G.711a/u, G.723.1, G.726-32K, G.729AB
Broadband Encoding	G.722
Rated Power	30W@DC24V, 25W@POE
Material	Iron(cover)/ABS(panel).
Size	230X150mm (Cutout size: 200mm)
Net Weight	2.3±0.25KG

Install
