

User Manual



Background Music Controller TCI-B425

In order to use the host quickly and correctly, please read the user manual carefully before use and keep the manual properly.

Note: The appearance of the product and the picture of the main interface of the system are for reference only. Please refer to the actual product for details.

Thank you to choose TCI intelligent background music controller, All products have undergone strict testing. The background music controller is widely used in high-end residential, villas, senior clubs, hotels, and other places of music.

Features

1. Audio format: support MP3, WAV, WMA, FLAC, APE, DTS, AAC, AC3, OGG and other audio formats, support LRC lyrics display.
2. Video format: Supports MPEG-1/2/3/4, RM/RMVB, WMV, MOV, MK, VOB, AVI, 3GP, H.264 and other video frames.
3. radio functions: built-in full digital automatic FM radio, 30 stations save.
4. Bluetooth function: It supports pairing of external Bluetooth devices such as mobile phones to realize audio playback.
5. External audio input: support external audio source input machine, amplify output.
6. Time calendar: It supports clock and calendar display functions.
7. Setting function: Support switching between Chinese and English; Set the screen saver on and off; Set the brightness of the backlight lamp; Set whether to play music on power; Set the boot volume; Set the time; Bluetooth name; Bluetooth password; Time clock time play; Software version; Set to restore factory Settings.
8. Memory card function: TF card can be plugged in, and the maximum support is 32GB TF card.
9. Storage function of USB flash disk: external usb flash disk can support up to 32GB USB flash disk.
10. Multiple cyclic play modes: support single play, random play, sequential play, single cycle, and all cyclic play modes
11. Timed power-on function: five files are timed power-on, with humanized operation. The music is automatically played when the machine is started, and the specified music is played regularly.

12. Timed shutdown function: power off at any time in five gears.
13. Volume adjustment: level 20 electronic volume adjustment function.
14. Power off memory function: remember the state played before the last power off.
15. Screen saver display time function: After setting the screen saver, the screen saver can display time.
16. Infrared remote control function: provide a variety of shortcut keys and humanized operation.
17. Doorbell trigger: Support external doorbell trigger function.
18. Local music can be played on power.
19. Support linkage trigger to play specified music.

Installation and Disassembly Instructions:

1. Embedded 86 bottom box with a depth of 57MM.
2. Wires used in this product: multi-strand copper wire, coaxial wire, audio wire and audio wire.
3. Please consult the supplier when installing the machine.
4. Do not repair the machine without authorization. If it needs to be repaired, please consult the supplier for professional maintenance.

Operation Steps

1. Music

After inserting TF memory card or USB flash drive, click the music icon and press "ok" to enter the local music playing mode. In the local music interface, you can select songs from the song list to play, the previous song, the next song, pause the play, volume and other functions.

2. Movie

After inserting TF memory card or USB flash drive, click "Confirm" to enter the local video mode. In the local video interface, you can select the video playback from the video list, the previous one, the next one, pause the playback, volume and other functions.

3. Radio

Click the radio receiver icon to enter FM radio mode. Short press "Ok" button will pop up the function bar. Through the function bar, you can choose to automatically search the radio channel, manually search the radio channel, and fine-tune the frequency point channel and other functions.

4. Bluetooth

Click the Bluetooth icon and enter the Bluetooth mode. The mobile phone and other Bluetooth devices search for the name of BGM_000 and the pairing name of 1234, and then connect with the host. After successful connection, the host will send the sound of successful connection

5. AUX

TV and other audio equipment are connected to the host through audio cable. Click AUX icon and enter AUX mode to output TV and other audio equipment to the host for playing.

6. Clock

Click the clock icon to enter the time display interface

7. Folder

Click the folder icon to enter the folder interface, where you can view relevant information of TF card and USB flash disk.

8. Icon Instruction

1» Language: switch between Chinese and English system language, default English system.

2» Screensaver: Set, 15 seconds, 30 seconds, 45 seconds, 60 seconds, 90 seconds, off, 6 screensaver modes.

3 » Backlight brightness: Set the brightness of level 1-10 display (the larger the number, the brighter the display).

- 4》 Power on and play music: Set up the power on, the remote control power on, touch the button to boot, whether to directly enter the music playing mode.
- 5》 Power on volume: Set the volume on power on.
- 6》 Set time: Set the current time.
- 7》 Bluetooth name: Set the host Bluetooth name (only set number.
- 8》 Bluetooth password: Set the Bluetooth pairing password (only set the number.
- 9》 Timer: Set the timer on and off function.
- 10》 Regular play: Set the function of regular play and turn off.
- 11》 Software version: View the current software version information.
- 12》 Restore factory Settings: restore factory state.

Host installation instructions

1. Screw the support on the 86 cartridge with the support screw. (See Figure 1)
2. Screw the wires inside the 86 cassette into the wiring splice of the corresponding function of the host, insert the wiring splice into the terminal post of the host, then put the host into the hardware support, and then push down.(As shown in Figure 2)

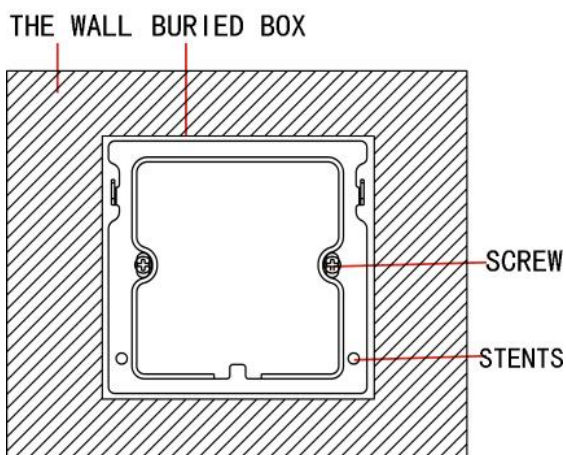


FIG. 1

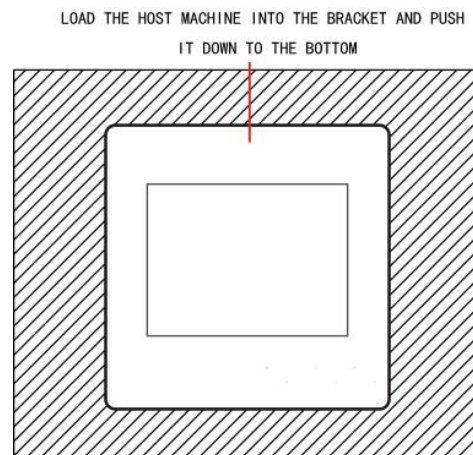


FIG. 2

3. Upon completion of installation, turn on the power switch button, and the machine can be started.



CAUTION: Do not open the equipment cover arbitrarily, so as not to electric shock. Please contact the professionals to maintain if necessary.